


หัวจับ รุ่น G

COLLET CHUCK G TYPE (PLATE COATING) BT ONLY

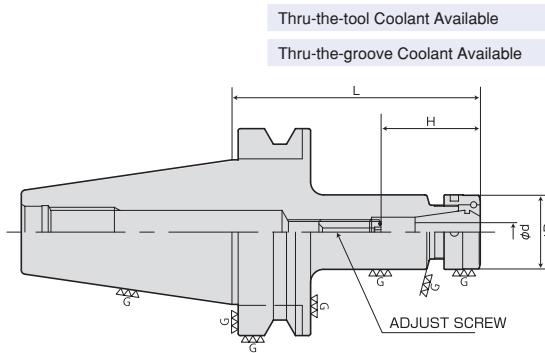

(sold separately)

Collet → Page 937-940

Screw → Page 932

Wrench → Page 934

Nut → Page 942

Order No.	Ød (GRIPPING RANGE)	ØD	L	H	COLLET	NUT	ADJUST SCREW	
Max. 25,000 min <sup>-1</sup>								
BT30 BBT30	0.5 ~ 7	24	60	24 ~ 40	CR07-(D)	RSN07NB	(M6x20L-CTW)	
			75					
			90					
			120					
	0.5 ~ 10	30	60	31 ~ 48	CR10-(D)	RSN10NB	RAS10-25-2.5	
			75					
			90					
			120					
	0.5 ~ 13	36	60	35 ~ 52	CR13-(D)	RSN13NB	RAS13-25-2.5	
			75					
			90					
			120					
1 ~ 16	42	60	38 ~ 50	CR16-(D)	RSN16NB	RAS16-25-5		
		75	38 ~ 72					
		90						
		120						
1.5 ~ 20	50	75	44 ~ 56.5	CR20-(D)	RSN20NB	RAS20-25-5		
		90						
		120						
		150						
BT40 BBT40	0.5 ~ 7	24	60	24 ~ 40	CR07-(D)	RSN07NB	(M6x20L-CTW)	
			75					
			90					
			120					
	0.5 ~ 10	30	60	31 ~ 48	CR10-(D)	RSN10NB	RAS10-22-2.5	
			75					
			90					
			120					
	0.5 ~ 13	36	60	35 ~ 52	CR13-(D)	RSN13NB	RAS13-25-2.5	
			75					
			90					
			120					
	1 ~ 16	42	60	38 ~ 70	CR16-(D)	RSN16NB	RAS16-25-5	
			75	38 ~ 77				
			90					
			120					
	1.5 ~ 20	50	60	44 ~ 70	CR20-(D)	RSN20NB	RAS20-25-5	
			75	44 ~ 72				
			90					
			120					
				150	44 ~ 82			

NOTE :  
 1. Collet and chuck wrench are sold separately.  
 2. CROH collet is used for thru-the-tool coolant application.  
 3. The above-mentioned maximum speed will vary depending on rigidity of machine and balance of cutter.  
 An adequated cutting condition should be selected for each case.  
 4. Only BT shank tools are coated. BBT shank tools are not coated.

**ORDERING EXAMPLE**

① BT30 - ② RSC ③ 07 - ④ 090 ⑤ G

① Shank Size  
 ② Holder's Name  
 ③ MAX. ØD  
 ④ G.L. Length  
 ⑤ G Type

BT Series  
รุ่น BT

HKS Series  
รุ่น HSK

ST Series  
รุ่น ST

Versatile Tool

Cutting Tool

Accessories

Drill Chuck

Milling Chuck

Hard Chuck

Collet Chuck

Drill Chuck

Hy-Dual Chuck

Tap Chuck

Boring Chuck

Side Lock Chuck

Morse Taper Holder

Face Mill Arbor

Shell Mill Arbor

Side Cutter Arbor

Traction Drive Speed Accelerator

Oil-Hole Adapter

Angle Head Holder