


หัวจับ COLLET CHUCK



(sold separately)

Collet	→ Page 937-940	Thru-the-tool Coolant Available
Screw	→ Page 932	Thru-the-groove Coolant Available
Wrench	→ Page 934	BBT Available

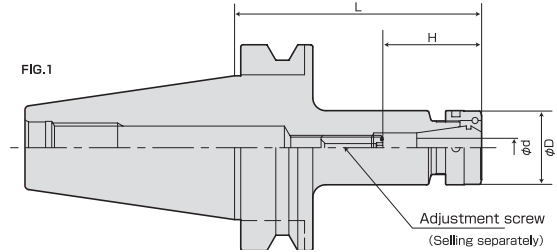

Order No.	Ød (GRIPPING RANGE)	ØD	L	H	COLLET	NUT	ADJUST SCREW		
Max. 12,000min ⁻¹									
BT30 BBT30	RSC07N	-060 200660	0.5 ~ 7	24	60	24 ~ 40	CR07-(D)	RSN07NB	(M6x20L-CTW)
		-075 200661			75				
		-090 200662			90				
		-120 200664			120				
	RSC10N	-060 200666	0.5 ~ 10	30	60	31 ~ 48	CR10-(D)	RSN10NB	RAS10-25-2.5
		-075 200667			75				
		-090 200668			90				
		-120 200670			120				
	RSC13N	-060 200672	0.5 ~ 13	36	60	35 ~ 52	CR13-(D)	RSN13NB	RAS13-25-2.5
		-075 200673			75				
		-090 200674			90				
		-120 200676			120				
RSC16N	-060 200678	1 ~ 16	42	60	38 ~ 50	CR16-(D)	RSN16NB	RAS16-25-5	
	-075 200679			75					
	-090 200680			90					
	-120 200682			120					
RSC20N	-075 200684	1.5 ~ 20	50	75	44 ~ 56.5	CR20-(D)	RSN20NB	RAS20-25-5	
	-090 200686			90					
	-120 200688			120					
	-120 200688			120					
BT40 BBT40	RSC07N	-060 221100	0.5 ~ 7	24	60	24 ~ 40	CR07-(D)	RSN07NB	(M6x20L-CTW)
		-075 221101			75				
		-090 221102			90				
		-120 221104			120				
	RSC10N	-060 221108	0.5 ~ 10	30	60	31 ~ 48	CR10-(D)	RSN10NB	RAS10-25-2.5
		-075 221109			75				
		-090 221110			90				
		-120 221112			120				
	RSC13N	-060 221116	0.5 ~ 13	36	60	35 ~ 52	CR13-(D)	RSN13NB	RAS13-25-2.5
		-075 221117			75				
		-090 221118			90				
		-120 221120			120				
	RSC16N	-060 221124	1 ~ 16	42	60	38 ~ 70	CR16-(D)	RSN16NB	RAS16-25-5
		-075 221125			75				
		-090 221126			90				
		-120 221128			120				
	RSC20N	-060 221132	1.5 ~ 20	50	60	44 ~ 70	CR20-(D)	RSN20NB	RAS20-25-5
		-075 221133			75				
		-090 221134			90				
		-120 221136			120				
	-150 221138	150	44 ~ 82						

NOTE :

1. Collet and chuck wrench are sold separately.
2. CROH collet is used for thru-the-tool coolant application.
3. The above-mentioned maximum speed will vary depending on rigidity of machine and balance of cutter.
4. Only BT shank tools are coated. BBT shank tools are not coated.

ORDERING EXAMPLE

① **BT30** - ② **RSC** ③ **07** - ④ **090**

- ① Shank Size
- ② Holder's Name
- ③ MAX. ØD
- ④ G.L. Length

ARBOR

หัวจับ



หัวจับ (รุ่นยาว)


COLLET CHUCK (LONG TYPE)



Thru-the-tool Coolant Available

Thru-the-groove Coolant Available

BBT Available

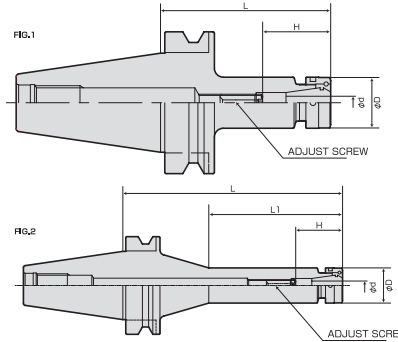

(sold separately)

Collet → Page 937-940

Screw → Page 932

Wrench → Page 934

Nut → Page 942

	Order No.	Fig	Ød (GRIPPING RANGE)	ØD	L	L1	H	COLLET	NUT	ADJUST SCREW									
	Max. 8,000 min ⁻¹																		
Collet Chuck	RSC07N -090 251230	1	0.5 ~ 7	24	90	-	24 ~ 40	CR07-(D)	RSN07NB	(M6x20L-CTW)									
	-135 251232				135														
	-165 251234				165														
	-195 251235				195														
Drill Chuck	RSC10N -075 251238	1	0.5 ~ 10	30	75	-	31 ~ 48	CR10-(D)	RSN10NB	RAS10-25-2.5									
	-105 251240				105														
	-135 251242				135														
	-165 251244				165														
	-195 251246				195														
	-225 251248				225														
Tap Chuck	-255 251250	2			255	150													
	-285 251252				285	190													
	RSC13N -075 251254				1	0.5 ~ 13					36	75	-	35 ~ 52	CR13-(D)	RSN13NB	RAS13-25-2.5		
	-105 251256											105							
-135 251258	135																		
-165 251260	165																		
Morse Taper Holder	-195 251262	2			195	150													
	-225 251264				225	180													
	-255 251266				255	180													
	-285 251268				285	190													
	Face Mill Arbor				RSC16N -075 251270	1					1 ~ 16	42	75	-	38 ~ 95	CR16-(D)	RSN16NB	RAS16-25-5	
					-105 251272								105						
-135 251274		135																	
-165 251276		165																	
-195 251278		195																	
-225 251280		225	150																
Side Cutter Arbor		-255 251282	2				255	180	38 ~ 77										
		-285 251284					285	190											
	RSC20N -075 251286	1				1.5 ~ 20	50	75			-	44 ~ 82		CR20-(D)	RSN20NB	RAS20-25-6			
	-105 251288							105											
-135 251290	135																		
-165 251292	165																		
Traction Drive Speed Accelerator	-195 251294		2					195	150										
	-225 251296							225	180										
	-255 251298							255	180										
	-285 251300							285	190										

NOTE :

1. Collet and chuck wrench are sold separately.
2. CROH collet is used for thru-the-tool coolant application.
3. The above-mentioned maximum speed will vary depending on rigidity of machine and balance of cutter.
An adequate cutting condition should be selected for each case.
4. Only BT shank tools are coated. BBT shank tools are not coated.

ORDERING EXAMPLE

① **BT50** - ② **RSC** ③ **10** - ④ **225**

① Shank Size

② Holder's Name

③ MAX. ØD

④ G.L. Length