



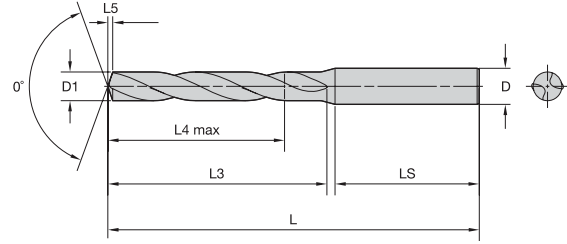

## ดอกสว่านคาร์ไบด์

### SOLID CARBIDE DRILL - GOdrill (5D)

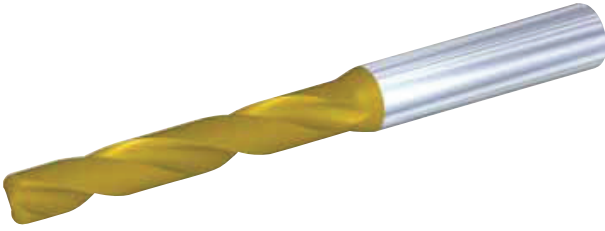

#### Features and Benefits

- GOdrill — the first microdrill from Kennametal.
- General purpose SC drill for a wide range of materials.
- Marginless design for reduced friction and heat — thus longer tool life.
- Optimized gashing design for microdrilling ensures free flow of chips in the center of the drill.
- Uninterrupted straight cutting lip allows no starting point for wear and enables even distribution of cutting forces for longer tool life in all materials and less chipping on cutting edge.
- KC7325™ grade contains a double coating for broad-band applications, and a TiN top layer serves as a wear indicator for easier monitoring of small drills, which can be difficult to see.

Order No.	D1 diameter				L5	LS	D	L	L3	L4 max
	mm	in	fraction	wire size						
B042A01000CPG	1,000	.0394	-	-	0,1	28	4			
B042A01016CPG	1,016	.0400	-	-	0,1	28	4			
B042A01041CPG	1,041	.0410	-	-	0,2	28	4			
B042A01067CPG	1,067	.0420	-	-	0,2	28	4			
B042A01092CPG	1,092	.0430	-	-	0,2	28	4			
B042A01100CPG	1,100	.0433	-	-	0,2	28	4			
B042A01181CPG	1,181	.0465	-	-	0,2	28	4	58	9	6
B042A01191CPG	1,191	.0469	-	-	0,2	28	4			
B042A01200CPG	1,200	.0472	-	-	0,2	28	4			
B042A01300CPG	1,300	.0512	-	-	0,2	28	4			
B042A01321CPG	1,321	.0520	-	-	0,2	28	4			
B042A01397CPG	1,397	.0550	-	-	0,2	28	4			
B042A01400CPG	1,400	.0551	-	-	0,2	28	4			
B042A01500CPG	1,500	.0591	-	-	0,2	28	4			
B042A01600CPG	1,600	.0630	-	-	0,2	28	4			
B042A01700CPG	1,700	.0669	-	-	0,3	28	4			
B042A01800CPG	1,800	.0709	-	-	0,3	28	4			
B042A01900CPG	1,900	.0748	-	-	0,3	28	4	58	12	9
B042A01984CPG	1,984	.0781	-	-	0,3	28	4			
B042A02000CPG	2,000	.0787	-	-	0,3	28	4			
B042A02100CPG	2,100	.0827	-	-	0,3	28	4			
B042A02200CPG	2,200	.0866	-	-	0,3	28	4			
B042A02300CPG	2,300	.0906	-	-	0,4	28	4			
B042A02383CPG	2,383	.0938	3/32	-	0,4	28	4			
B042A02400CPG	2,400	.0945	-	-	0,4	28	4			
B042A02439CPG	2,439	.0960	-	41	0,4	28	4			
B042A02489CPG	2,489	.0980	-	40	0,4	28	4			
B042A02500CPG	2,500	.0984	-	-	0,4	28	4			
B042A02578CPG	2,578	.1015	-	38	0,4	28	4			
B042A02600CPG	2,600	.1024	-	-	0,4	28	4			
B042A02642CPG	2,642	.1040	-	37	0,4	28	4	58	22	17
B042A02700CPG	2,700	.1063	-	-	0,4	28	4			
B042A02705CPG	2,705	.1065	-	36	0,4	28	4			
B042A02779CPG	2,779	.1094	7/64	-	0,4	28	4			
B042A02800CPG	2,800	.1102	-	-	0,5	28	4			
B042A02820CPG	2,820	.1110	-	34	0,5	28	4			
B042A02870CPG	2,870	.1130	-	33	0,5	28	4			
B042A02900CPG	2,900	.1142	-	-	0,5	28	4			
B042A02947CPG	2,947	.1160	-	32	0,5	28	4			
B042A03000CPG	3,000	.1181	-	-	0,5	36	6			
B042A03048CPG	3,048	.1200	-	31	0,5	36	6			
B042A03100CPG	3,100	.1220	-	-	0,5	36	6			
B042A03175CPG	3,175	.1250	1/8	-	0,5	36	6			
B042A03200CPG	3,200	.1260	-	-	0,5	36	6			
B042A03264CPG	3,264	.1285	-	30	0,5	36	6	66	28	23
B042A03300CPG	3,300	.1299	-	-	0,5	36	6			
B042A03400CPG	3,400	.1339	-	-	0,6	36	6			
B042A03455CPG	3,455	.1360	-	29	0,6	36	6			
B042A03500CPG	3,500	.1378	-	-	0,6	36	6			

# DRILLS

ดอกสว่าน

Straight Shank

ดอกสว่านมาตรฐาน



Order No.	D1 diameter				L5	LS	D	L	L3	L4 max
	mm	in	fraction	wire size						
B042A03571CPG	3,571	.1406	9/64	-	0,6	36	6			
B042A03600CPG	3,600	.1417	-	-	0,6	36	6			
B042A03658CPG	3,658	.1440	-	27	0,6	36	6	66	28	23
B042A03700CPG	3,700	.1457	-	-	0,6	36	6			
B042A03734CPG	3,734	.1470	-	26	0,6	36	6			
B042A03800CPG	3,800	.1496	-	-	0,6	36	6			
B042A03900CPG	3,900	.1535	-	-	0,6	36	6			
B042A03970CPG	3,970	.1563	5/32	-	0,7	36	6			
B042A04000CPG	4,000	.1575	-	-	0,7	36	6			
B042A04039CPG	4,039	.1590	-	21	0,7	36	6			
B042A04090CPG	4,090	.1610	-	20	0,7	36	6			
B042A04100CPG	4,100	.1614	-	-	0,7	36	6			
B042A04200CPG	4,200	.1654	-	-	0,7	36	6	74	36	29
B042A04217CPG	4,217	.1660	-	19	0,7	36	6			
B042A04300CPG	4,300	.1693	-	-	0,7	36	6			
B042A04366CPG	4,366	.1719	11/64	-	0,7	36	6			
B042A04400CPG	4,400	.1732	-	-	0,7	36	6			
B042A04500CPG	4,500	.1772	-	-	0,7	36	6			
B042A04600CPG	4,600	.1811	-	-	0,8	36	6			
B042A04623CPG	4,623	.1820	-	14	0,8	36	6			
B042A04700CPG	4,700	.1850	-	13	0,8	36	6			
B042A04763CPG	4,763	.1875	3/16	-	0,8	36	6			
B042A04800CPG	4,800	.1890	-	12	0,8	36	6			
B042A04852CPG	4,852	.1910	-	11	0,8	36	6			
B042A04900CPG	4,900	.1929	-	-	0,8	36	6			
B042A05000CPG	5,000	.1969	-	-	0,8	36	6			
B042A05100CPG	5,100	.2008	-	-	0,8	36	6			
B042A05106CPG	5,106	.2010	-	7	0,8	36	6			
B042A05159CPG	5,159	.2031	13/64	-	0,9	36	6			
B042A05200CPG	5,200	.2047	-	-	0,9	36	6			
B042A05300CPG	5,300	.2087	-	-	0,9	36	6	82	44	35
B042A05400CPG	5,400	.2126	-	-	0,9	36	6			
B042A05410CPG	5,410	.2130	-	3	0,9	36	6			
B042A05500CPG	5,500	.2165	-	-	0,9	36	6			
B042A05558CPG	5,558	.2188	7/32	-	0,9	36	6			
B042A05600CPG	5,600	.2205	-	-	0,9	36	6			
B042A05616CPG	5,616	.2211	-	2	0,9	36	6			
B042A05700CPG	5,700	.2244	-	-	1,0	36	6			
B042A05800CPG	5,800	.2283	-	-	1,0	36	6			
B042A05900CPG	5,900	.2323	-	-	1,0	36	6			
B042A05954CPG	5,954	.2344	15/64	-	1,0	36	6			
B042A06000CPG	6,000	.2362	-	-	1,0	36	6			
B042A06100CPG	6,100	.2402	-	-	1,0	36	8			
B042A06200CPG	6,200	.2441	-	-	1,0	36	8			
B042A06300CPG	6,300	.2480	-	-	1,1	36	8			
B042A06350CPG	6,350	.2500	1/4	E	1,1	36	8			
B042A06400CPG	6,400	.2520	-	-	1,1	36	8			
B042A06500CPG	6,500	.2559	-	-	1,1	36	8			
B042A06528CPG	6,528	.2570	-	F	1,1	36	8			
B042A06600CPG	6,600	.2598	-	-	1,1	36	8			
B042A06630CPG	6,630	.2610	-	G	1,1	36	8			
B042A06700CPG	6,700	.2638	-	-	1,1	36	8			
B042A06746CPG	6,746	.2656	17/64	-	1,1	36	8			
B042A06800CPG	6,800	.2677	-	-	1,1	36	8	91	53	43
B042A06900CPG	6,900	.2717	-	-	1,2	36	8			
B042A07000CPG	7,000	.2756	-	-	1,2	36	8			
B042A07100CPG	7,100	.2795	-	-	1,2	36	8			
B042A07145CPG	7,145	.2813	9/32	-	1,2	36	8			
B042A07200CPG	7,200	.2835	-	-	1,2	36	8			
B042A07300CPG	7,300	.2874	-	-	1,2	36	8			
B042A07400CPG	7,400	.2913	-	-	1,3	36	8			
B042A07500CPG	7,500	.2953	-	-	1,3	36	8			
B042A07541CPG	7,541	.2969	19/64	-	1,3	36	8			
B042A07600CPG	7,600	.2992	-	-	1,3	36	8			
B042A07700CPG	7,700	.3031	-	-	1,3	36	8			
B042A07800CPG	7,800	.3071	-	-	1,3	36	8			
B042A07900CPG	7,900	.3110	-	-	1,3	36	8			
B042A07938CPG	7,938	.3125	5/16	-	1,3	36	8			
B042A08000CPG	8,000	.3150	-	-	1,4	36	8			
B042A08100CPG	8,100	.3189	-	-	1,4	40	10			
B042A08200CPG	8,200	.3228	-	-	1,4	40	10			
B042A08300CPG	8,300	.3268	-	-	1,4	40	10			
B042A08334CPG	8,334	.3281	21/64	-	1,4	40	10	103	61	49
B042A08400CPG	8,400	.3307	-	-	1,4	40	10			
B042A08433CPG	8,433	.3320	-	Q	1,4	40	10			