


ดอกสว่านไฮสปีด (พาราโบลิก)

Jobber drills long series, DIN 340 Forte (Parabolic)

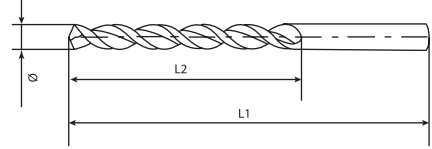

				INOX <850N/mm²	INOX >850N/mm²	CAST IRON	Cu, Ms	Al	
HSS Co5	DIN 340	Type Forte	130°						

Range of application:
5% cobalt-alloyed high efficiency drills with reinforced web with special designed flute profile for better chip removal and deeper holes, suitable for steels up to 1100 N/mm².

Order No. 511 Art. - Nr.	Ø _{h8} mm	L1 mm	L2 mm
511001001	1.00	56	33
511001101	1.10	60	37
511001201	1.20	65	41
511001301	1.30	65	41
511001401	1.40	70	45
511001501	1.50	70	45
511001601	1.60	76	50
511001701	1.70	76	50
511001801	1.80	80	53
511001901	1.90	80	53
511002001	2.00	85	56
511002101	2.10	85	56
511002201	2.20	90	59
511002301	2.30	90	59
511002401	2.40	95	62
511002501	2.50	95	62
511002601	2.60	95	62
511002701	2.70	100	66
511002801	2.80	100	66
511002901	2.90	100	66
511003001	3.00	100	66
511003101	3.10	106	69
511003201	3.20	106	69
511003301	3.30	106	69
511003401	3.40	112	73
511003501	3.50	112	73
511003601	3.60	112	73
511003701	3.70	112	73
511003801	3.80	119	78
511003901	3.90	119	78
511004001	4.00	119	78
511004201	4.20	119	78

Order No. 511 Art. - Nr.	Ø _{h8} mm	L1 mm	L2 mm
511004501	4.50	126	82
511004801	4.80	132	87
511005001	5.00	132	87
511005201	5.20	132	87
511005501	5.50	139	91
511005801	5.80	139	91
511006001	6.00	139	91
511006201	6.20	148	97
511006501	6.50	148	97
511006801	6.80	156	102
511007001	7.00	156	102
511007201	7.20	156	102
511007501	7.50	156	102
511007801	7.80	165	109
511008001	8.00	165	109
511008201	8.20	165	109
511008501	8.50	165	109
511009001	9.00	175	115
511009501	9.50	175	115
511009801	9.80	184	121
511010001	10.00	184	121
511010201	10.20	184	121
511010501	10.50	184	121
511011001	11.00	195	128
511011501	11.50	195	128
511012001	12.00	205	134
511012501	12.50	205	134
511013001	13.00	205	134
511014001	14.00	214	140

Carbide Drills

ดอกสว่านคาร์ไบด์

HSS Drills

ดอกสว่านไฮสปีด

Stub / Standard

หัวสั้น / มาตรฐาน

Long

หัวยาว

Micro Drill

ดอกสว่านไมโคร

Z Plunging

Step Borer