

DN2HC-ATH

Chamfering Tool for Hardened Steels



Mitsubishi Hitachi Tool Engineering, Ltd.

New Product News | No.1904E | 2019-12

**Allows numerically controlled (NC) automated centering and chamfering.
Long tool life even when machining hardened steel**



Features of DN2HC-ATH

01

Thinning provides good biting properties.
High defect resistance due to the blunt-angled tip
Optimized edge shape for outstanding cutting capabilities and high defect resistance

02

ATH coating provides long tool life, even with hardened steel.



DN2HC-ATH
φ3~φ16 [72 Items]


Task

A wide range of chamfering is required for molds and parts, which are often processed manually.
In addition, few chamfering tools are available for hardened steel.



Proposal

Using DN2HC allows NC automated machining, reducing manual processing time. Compatible with a wide range of steel types ranging from soft steel to hardened steel; provides long tool life and quality processed surfaces.

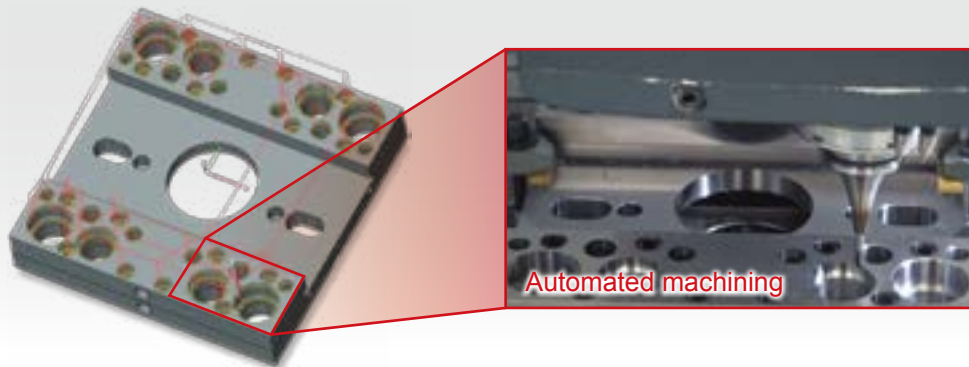

This is Point!


Edge shape offers high defect resistance and outstanding cutting capabilities to suppress burr generation and achieve automated and stable machining.

Good biting properties by thinning

DN2HC-ATH

Conventional chamfering tool



Resistant to defects due to the blunt-angled tip

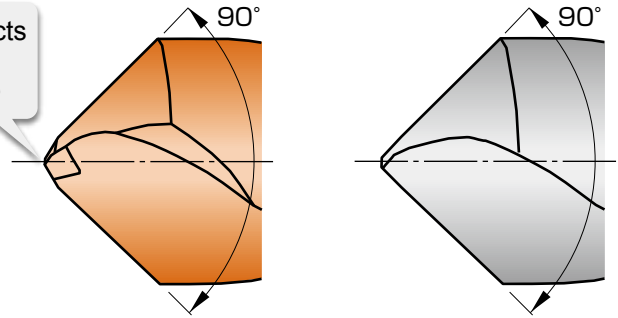

Optimized edge shape for outstanding cutting capabilities and high defect resistance

Cutting conditions


Tool : DN2HC0600-ATH ($\phi 6 \times l 15 \times L 66$)
 Work material : Steel for plastic molds (53HRC)
 Machine : Vertical MC (HSK-A63)
 $v_c = 30 \text{ m/min}$ $n = 1,592 \text{ min}^{-1}$
 $f = 0.06 \text{ mm/rev}$ $v_f = 95 \text{ mm/min}$
 Coolant : Water base coolant (External)

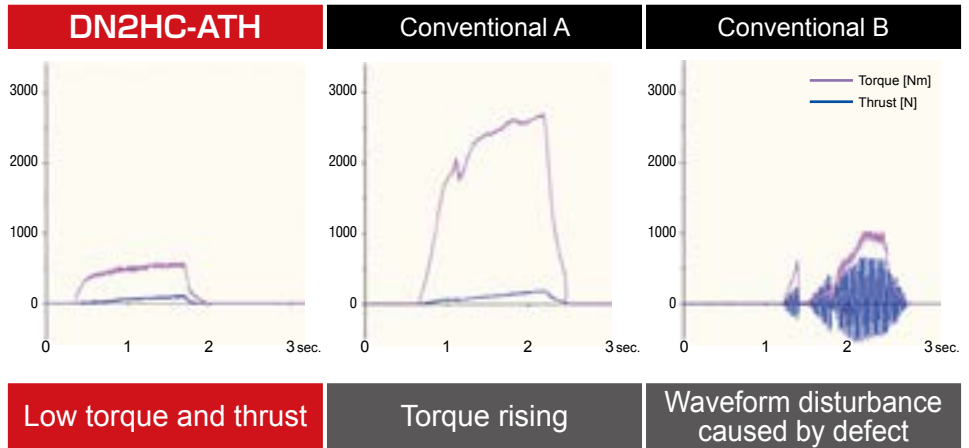

- Hardness and oxidation resistance of TH coatings is further improved. Enables longer life and higher efficient when cutting high-hardness materials. (Si nano composite coating with finer crystal particles)
- Exhibits amazing performance when cutting high-hardness materials (55HRC or higher)
- Long life for both dry cutting and wet cutting

Cutting conditions



Tool : DN2HC0600-ATH ($\phi 6 \times l 15 \times L 66$) Work material : SKD11 (60HRC)
 Machine : Horizontal MC (HSK-A63)
 $v_c = 30 \text{ m/min}$ $n = 1,592 \text{ min}^{-1}$ $f = 0.06 \text{ mm/rev}$ $v_f = 95 \text{ mm/min}$
 Coolant : Water base coolant (External)



| Tool tip | | | Top of hole | | |
|--------------------------------------|-----------------------|-----------------------|----------------------------|-------------------------------|----------------|
| DN2HC-ATH | Conventional A | Conventional B | DN2HC-ATH | Conventional A | Conventional B |
| | | | | | |
| Tool life extends beyond 576th hole. | Damaged on 384th hole | Damaged on 384th hole | Good surface without tears | Tear caused by defect on edge | |

Resistant to defects; provides long life compared to conventional tools.

Line Up

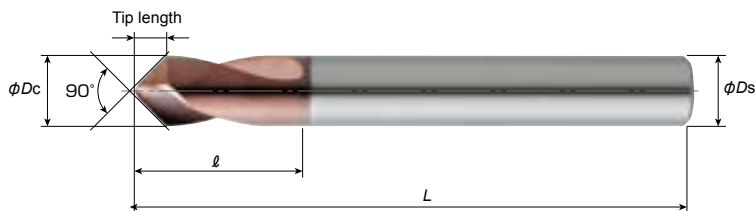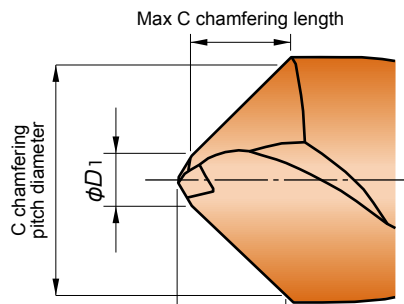

$D_1 = D_c / 4$ (Tip angle $\neq 90^\circ$) Max available depth

DN2HC-ATH



| Item Code | Stock | Size (mm) | | | | | | Usable length (mm) | | |
|---------------|-------|-----------------|----------------|------------|---------------------|--------------------|------------------|---------------------|-------------------------|--------------------------------|
| | | Tool dia. D_c | Tip dia. D_1 | Tip length | Flute length ℓ | Overall Length L | Shank Dia. D_s | Max available depth | Max C chamfering length | C chamfering pitch diameter |
| DN2HC0300-ATH | ● | 3 | 0.7 | 1.3 | 9 | 45 | 3 | 1.2 | 1.1 | More than 0.75 but less than 3 |
| DN2HC0400-ATH | ● | 4 | 0.95 | 1.7 | 12 | 50 | 4 | 1.6 | 1.5 | More than 1 but less than 4 |
| DN2HC0600-ATH | ● | 6 | 1.4 | 2.6 | 15 | 66 | 6 | 2.4 | 2.2 | More than 1.5 but less than 6 |
| DN2HC0800-ATH | ● | 8 | 1.9 | 3.4 | 20 | 74 | 8 | 3.2 | 3.0 | More than 2 but less than 8 |
| DN2HC1000-ATH | ● | 10 | 2.4 | 4.3 | 24 | 84 | 10 | 4.1 | 3.7 | More than 2.5 but less than 10 |
| DN2HC1200-ATH | ● | 12 | 2.9 | 5.1 | 28 | 95 | 12 | 4.9 | 4.5 | More than 3 but less than 12 |
| DN2HC1600-ATH | ● | 16 | 3.9 | 6.8 | 35 | 113 | 16 | 6.6 | 6.0 | More than 4 but less than 16 |


● : Stocked Items.

Re-grinding compatibility range table

| Item Code | Product Name | Tool dia. (mm) | Shape | Re-grinding compatibility range (mm) |
|-----------|-------------------------------------|----------------|-------|--------------------------------------|
| | | | | End |
| DN2HC-ATH | Chamfering Tool for Hardened Steels | 3~16 | | 3~16 |

Reference sizes of tool tip

Use it for creating machining programs and defining tool shapes in CAM as needed.

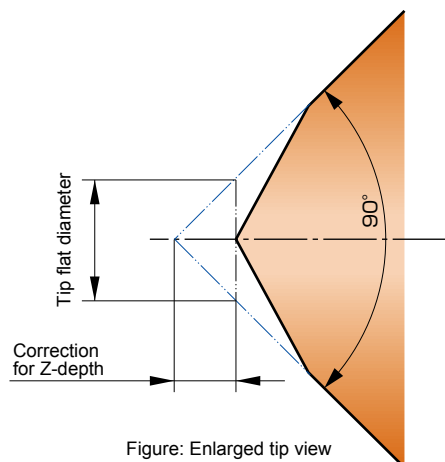


| Item Code | Tool dia. D_c | Reference size (mm) | |
|---------------|-----------------|---------------------|------------------------|
| | | Tip flat diameter | Correction for Z-depth |
| DN2HC0300-ATH | 3 | 0.4 | 0.2 |
| DN2HC0400-ATH | 4 | 0.6 | 0.3 |
| DN2HC0600-ATH | 6 | 0.8 | 0.4 |
| DN2HC0800-ATH | 8 | 1.2 | 0.6 |
| DN2HC1000-ATH | 10 | 1.4 | 0.7 |
| DN2HC1200-ATH | 12 | 1.8 | 0.9 |
| DN2HC1600-ATH | 16 | 2.4 | 1.2 |

SKD11 (60HRC) chamfering field data

Cutting conditions

Tool : DN2HC1200-ATH ($\phi 12 \times \phi 28 \times L95$)
 Work material : SKD11 (60HRC)
 Machine : Vertical MC (HSK-A63)

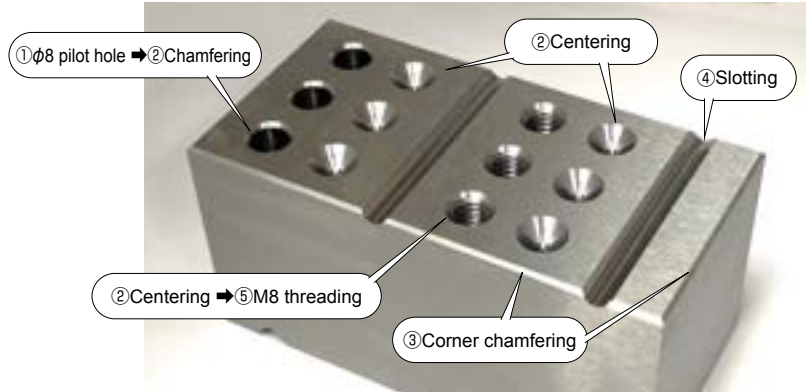

Allows various types of hardened steel chamfering



| No. | Process | Tool | Vc (m/min) | n (min ⁻¹) | f (mm/rev) | Vf (mm/min) | ap (mm) | ae (mm) | Hole depth (mm) | Coolant |
|-----|--|---|------------|------------------------|---------------|-------------|---------|---------|-----------------|---------------|
| ① | φ8 pilot hole | NSBH0800-40-ATH ($\phi 8 \times \phi 40 \times L95 \times \phi 10$) | 10 | 400 | 0.05 (mm/rev) | 20 | — | — | 20 | Internal, Wet |
| ② | Hole chamfering/centering top diameter φ10 | DN2HC1200-ATH ($\phi 12 \times \phi 28 \times L95$) | 30 | 800 | 0.06 (mm/rev) | 48 | — | — | 4.1 | External, Air |
| ③ | Corner chamfering C1 | DN2HC1200-ATH ($\phi 12 \times \phi 28 \times L95$) | 301 | 8000 | 0.03 (mm/t) | 480 | 1 | 1 | — | External, Air |
| ④ | Slotting top width 3 mm | DN2HC1200-ATH ($\phi 12 \times \phi 28 \times L95$) | 120 | 3200 | 0.03 (mm/t) | 192 | 2.1 | — | — | External, Air |
| ⑤ | M8 threading | EDT-1.25-16-TH (M8×P1.25) | 35 | 1800 | 0.031 (mm/t) | 50 | — | — | 12 | External, Air |

Steel for plastic molds (53HRC) chamfering/threading field data

Generally, a tapped hole entrance requires chamfering. Combination of DN2HC and Epoch D Thread Mill allows deformation-free threading.

Cutting conditions

Centering
 Tool : DN2HC1200-ATH ($\phi 12 \times \phi 28 \times L95$)
 Work material : Steel for plastic molds (53HRC)
 Machine : Vertical MC (HSK-F63)
 vc=30m/min n=800min⁻¹ f=0.06mm/rev vf=48mm/min
 Coolant : Water base coolant (External)

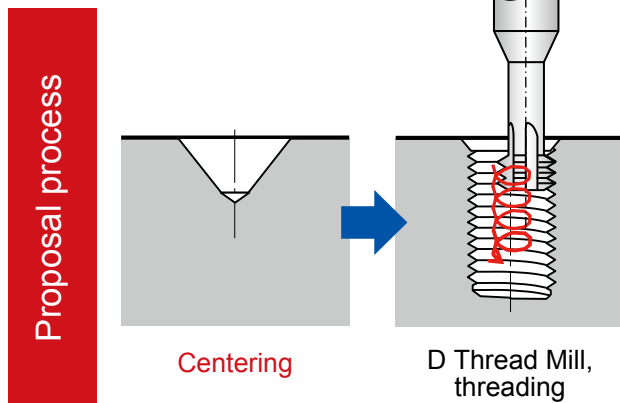

Features of Epoch D Thread Mill

- This single tool can perform both drilling and threading simultaneously.



Size M2~M20

No pilot hole needed





Recommended Cutting Conditions

Centering





C Chamfering (Bore)



| Work material (Hardness) | Structural steel, Carbon steel, Alloy steel (~30HRC) SS S ₀ OC SCM | | | Pre-hardened steel (30~40HRC) SKD61 | | |
|-----------------------------|--|--------------------------|---------------------------|--|--------------------------|---------------------------|
| | Revolution n (min ⁻¹) | Feed rate v_f (mm/min) | Feed per rev f (mm/rev) | Revolution n (min ⁻¹) | Feed rate v_f (mm/min) | Feed per rev f (mm/rev) |
| Cutting speed v_c (m/min) | 50~80~120 | | | 40~60~80 | | |
| Tool dia. (mm) | | | | | | |
| $\phi 3$ | 8500 | 510 | 0.06 0.04~0.08 | 6400 | 320 | 0.05 0.03~0.07 |
| $\phi 4$ | 6400 | 384 | 0.06 0.04~0.08 | 4800 | 240 | 0.05 0.03~0.07 |
| $\phi 6$ | 4200 | 294 | 0.07 0.05~0.09 | 3200 | 192 | 0.06 0.04~0.08 |
| $\phi 8$ | 3200 | 240 | 0.075 0.05~0.10 | 2400 | 144 | 0.06 0.04~0.08 |
| $\phi 10$ | 2500 | 200 | 0.08 0.05~0.11 | 1900 | 124 | 0.065 0.04~0.09 |
| $\phi 12$ | 2100 | 168 | 0.08 0.05~0.11 | 1600 | 104 | 0.065 0.04~0.09 |
| $\phi 16$ | 1600 | 192 | 0.12 0.10~0.14 | 1200 | 96 | 0.08 0.06~0.10 |


C Chamfering (Corner)



| Work material (Hardness) | Structural steel, Carbon steel, Alloy steel (~30HRC) SS S ₀ OC SCM | | | Pre-hardened steel (30~40HRC) SKD61 | | |
|-----------------------------|--|--------------------------|-------------------------------|--|--------------------------|-------------------------------|
| | Revolution n (min ⁻¹) | Feed rate v_f (mm/min) | Feed per tooth f_z (mm/rev) | Revolution n (min ⁻¹) | Feed rate v_f (mm/min) | Feed per tooth f_z (mm/rev) |
| Cutting speed v_c (m/min) | 150~225~300 | | | 100~165~250 | | |
| Tool dia. (mm) | | | | | | |
| $\phi 3$ | 24,000 | 1,440 | 0.03 0.020~0.040 | 17,500 | 875 | 0.025 0.015~0.035 |
| $\phi 4$ | 18,000 | 1,080 | 0.03 0.020~0.040 | 13,100 | 655 | 0.025 0.015~0.035 |
| $\phi 6$ | 12,000 | 840 | 0.035 0.025~0.045 | 8,800 | 528 | 0.03 0.020~0.040 |
| $\phi 8$ | 9,000 | 675 | 0.0375 0.025~0.050 | 6,600 | 396 | 0.03 0.020~0.040 |
| $\phi 10$ | 7,200 | 576 | 0.04 0.025~0.055 | 5,300 | 345 | 0.0325 0.020~0.045 |
| $\phi 12$ | 6,000 | 480 | 0.04 0.025~0.055 | 4,400 | 286 | 0.0325 0.020~0.045 |
| $\phi 16$ | 4,500 | 540 | 0.06 0.050~0.070 | 3,300 | 264 | 0.04 0.030~0.050 |

• $C = Dc \times 20\%$ is used as a general guideline for cutting conditions. Adjust by decreasing the rotation speed and feed rate if $C > Dc \times 20\%$.

Slotting



| Work material (Hardness) | Structural steel, Carbon steel, Alloy steel (~30HRC) SS S ₀ OC SCM | | | Pre-hardened steel (30~40HRC) SKD61 | | |
|-----------------------------|--|--------------------------|-------------------------------|--|--------------------------|-------------------------------|
| | Revolution n (min ⁻¹) | Feed rate v_f (mm/min) | Feed per tooth f_z (mm/rev) | Revolution n (min ⁻¹) | Feed rate v_f (mm/min) | Feed per tooth f_z (mm/rev) |
| Max available depth ratio | 100% | | | 100% | | |
| Cutting speed v_c (m/min) | 100~180~260 | | | 100~165~230 | | |
| Tool dia. (mm) | | | | | | |
| $\phi 3$ | 19100 | 1146 | 0.03 0.020~0.040 | 17500 | 875 | 0.025 0.015~0.035 |
| $\phi 4$ | 14300 | 858 | 0.03 0.020~0.040 | 13100 | 655 | 0.025 0.015~0.035 |
| $\phi 6$ | 9600 | 672 | 0.035 0.025~0.045 | 8800 | 528 | 0.03 0.020~0.040 |
| $\phi 8$ | 7200 | 540 | 0.0375 0.025~0.050 | 6600 | 396 | 0.03 0.020~0.040 |
| $\phi 10$ | 5700 | 456 | 0.04 0.025~0.055 | 5300 | 345 | 0.0325 0.020~0.045 |
| $\phi 12$ | 4800 | 384 | 0.04 0.025~0.055 | 4400 | 286 | 0.0325 0.020~0.045 |
| $\phi 16$ | 3600 | 432 | 0.06 0.050~0.070 | 3300 | 264 | 0.04 0.030~0.050 |

• For hardened steel, large cutting loads may prevent machining of max available depths in a single operation. Make adjustments: for example, machining the groove depth in two operations, referring to max available depth ratios.

[Setting of cutting conditions]

- Coolant is recommended for work materials of 40HRC or harder, stainless steel, and aluminium.
- These recommended cutting conditions are for general guidelines. Adjust cutting parameters for actual machining based on machining shape, purpose, machine used, and other factors.
- When attaching the tool, use a collet free of scratches or dirt. Keep tool runout to 0.02 mm or less.
- Secure the work material firmly to prevent deformation, deflection, and vibration.
- Watch for smoke and fire hazards posed by heated chips or tools.

| Pre-hardened steel (40~50HRC) SKD61 | | | Cold working tool steel (50~60HRC) SKD11 | | | High-speed tool steel (60~65HRC) SKH | | | Stainless steel SUS | Cast iron, Ductile cast iron FC FCD | | | Aluminium, Copper Al, Cu | | |
|--|---|--------------------------------------|--|---|--------------------------------------|--|---|--------------------------------------|--|---|--------------------------------------|--|---|--------------------------------------|--|
| 30~40~50 | | | 20~30~40 | | | 10~20~30 | | | 40~60~100 | | | 50~100~150 | | | |
| Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per rev <i>f</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per rev <i>f</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per rev <i>f</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per rev <i>f</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per rev <i>f</i> (mm/rev) | |
| 4200 | 168 | 0.04 0.02~0.06 | 3200 | 128 | 0.04 0.02~0.06 | 2100 | 84 | 0.04 0.02~0.06 | 6400 | 384 | 0.06 0.04~0.08 | 11000 | 660 | 0.06 0.04~0.08 | |
| 3200 | 128 | 0.04 0.02~0.06 | 2400 | 96 | 0.04 0.02~0.06 | 1600 | 64 | 0.04 0.02~0.06 | 4800 | 288 | 0.06 0.04~0.08 | 8000 | 480 | 0.06 0.04~0.08 | |
| 2100 | 126 | 0.06 0.04~0.08 | 1600 | 96 | 0.06 0.04~0.08 | 1100 | 66 | 0.06 0.04~0.08 | 3200 | 224 | 0.07 0.05~0.09 | 5300 | 371 | 0.07 0.05~0.09 | |
| 1600 | 96 | 0.06 0.04~0.08 | 1200 | 72 | 0.06 0.04~0.08 | 800 | 48 | 0.06 0.04~0.08 | 2400 | 180 | 0.075 0.05~0.10 | 4000 | 300 | 0.075 0.05~0.10 | |
| 1300 | 78 | 0.06 0.04~0.08 | 960 | 58 | 0.06 0.04~0.08 | 640 | 38 | 0.06 0.04~0.08 | 1900 | 152 | 0.08 0.05~0.11 | 3200 | 256 | 0.08 0.05~0.11 | |
| 1100 | 66 | 0.06 0.04~0.08 | 800 | 48 | 0.06 0.04~0.08 | 530 | 32 | 0.06 0.04~0.08 | 1600 | 128 | 0.08 0.05~0.11 | 2700 | 216 | 0.08 0.05~0.11 | |
| 800 | 64 | 0.08 0.06~0.10 | 600 | 48 | 0.08 0.06~0.10 | 400 | 32 | 0.08 0.06~0.10 | 1200 | 144 | 0.12 0.10~0.14 | 2000 | 240 | 0.12 0.10~0.14 | |

| Cold working tool steel (50~60HRC) SKD11 | | | 高速度工具鋼 High-speed tool steel (60~65HRC) SKH | | | Stainless steel SUS | | | Cast iron, Ductile cast iron FC FCD | | | Aluminium, Copper Al, Cu | | |
|--|---|--|--|---|--|--|---|--|--|---|--|--|---|--|
| 50~110~180 | | | 40~75~120 | | | 50~90~160 | | | 100~180~260 | | | 200~300~400 | | |
| Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per tooth <i>f_z</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per tooth <i>f_z</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per tooth <i>f_z</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per tooth <i>f_z</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per tooth <i>f_z</i> (mm/rev) |
| 12,000 | 480 | 0.02 0.010~0.030 | 8,000 | 320 | 0.02 0.010~0.030 | 9,600 | 384 | 0.02 0.010~0.030 | 19,100 | 1,146 | 0.03 0.020~0.040 | 32,000 | 1,920 | 0.03 0.020~0.040 |
| 8,800 | 352 | 0.02 0.010~0.030 | 6,000 | 240 | 0.02 0.010~0.030 | 7,200 | 288 | 0.02 0.010~0.030 | 14,300 | 858 | 0.03 0.020~0.040 | 24,000 | 1,440 | 0.03 0.020~0.040 |
| 5,800 | 348 | 0.03 0.020~0.040 | 4,000 | 240 | 0.03 0.020~0.040 | 4,800 | 288 | 0.03 0.020~0.040 | 9,600 | 672 | 0.035 0.025~0.045 | 16,000 | 1,120 | 0.035 0.025~0.045 |
| 4,400 | 264 | 0.03 0.020~0.040 | 3,000 | 180 | 0.03 0.020~0.040 | 3,600 | 216 | 0.03 0.020~0.040 | 7,200 | 540 | 0.0375 0.025~0.050 | 12,000 | 900 | 0.0375 0.025~0.050 |
| 3,500 | 210 | 0.03 0.020~0.040 | 2,400 | 144 | 0.03 0.020~0.040 | 2,900 | 174 | 0.03 0.020~0.040 | 5,700 | 456 | 0.04 0.025~0.055 | 9,600 | 768 | 0.04 0.025~0.055 |
| 2,900 | 174 | 0.03 0.020~0.040 | 2,000 | 120 | 0.03 0.020~0.040 | 2,400 | 144 | 0.03 0.020~0.040 | 4,800 | 384 | 0.04 0.025~0.055 | 8,000 | 640 | 0.04 0.025~0.055 |
| 2,200 | 176 | 0.04 0.030~0.050 | 1,500 | 120 | 0.04 0.030~0.050 | 1,800 | 144 | 0.04 0.030~0.050 | 3,600 | 432 | 0.06 0.050~0.070 | 6,000 | 720 | 0.06 0.050~0.070 |

| Pre-hardened steel (40~50HRC) SKD61 | | | Cold working tool steel (50~60HRC) SKD11 | | | High-speed tool steel (60~65HRC) SKH | | | Stainless steel SUS | Cast iron, Ductile cast iron FC FCD | | Aluminium, Copper Al, Cu |
|--|---|--|--|---|--|--|---|--|--|---|--|--------------------------------|
| 90% | | | 70% | | | 50% | | | 100% | | | |
| 100~150~200 | | | 50~115~150 | | | 30~75~120 | | | 100~180~260 | | | |
| Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per tooth <i>f_z</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per tooth <i>f_z</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per tooth <i>f_z</i> (mm/rev) | Revolution <i>n</i> (min ⁻¹) | Feed rate <i>v_f</i> (mm/min) | Feed per tooth <i>f_z</i> (mm/rev) | |
| 16000 | 640 | 0.02 0.010~0.030 | 12000 | 480 | 0.02 0.010~0.030 | 8000 | 320 | 0.02 0.010~0.030 | 19100 | 1146 | 0.03 0.020~0.040 | |
| 12000 | 480 | 0.02 0.010~0.030 | 9200 | 368 | 0.02 0.010~0.030 | 6000 | 240 | 0.02 0.010~0.030 | 14300 | 858 | 0.03 0.020~0.040 | |
| 8000 | 480 | 0.03 0.020~0.040 | 6100 | 366 | 0.03 0.020~0.040 | 4000 | 240 | 0.03 0.020~0.040 | 9600 | 672 | 0.035 0.025~0.045 | |
| 6000 | 360 | 0.03 0.020~0.040 | 4600 | 276 | 0.03 0.020~0.040 | 3000 | 180 | 0.03 0.020~0.040 | 7200 | 540 | 0.0375 0.025~0.050 | |
| 4800 | 288 | 0.03 0.020~0.040 | 3700 | 222 | 0.03 0.020~0.040 | 2400 | 144 | 0.03 0.020~0.040 | 5700 | 456 | 0.04 0.025~0.055 | |
| 4000 | 240 | 0.03 0.020~0.040 | 3100 | 186 | 0.03 0.020~0.040 | 2000 | 120 | 0.03 0.020~0.040 | 4800 | 384 | 0.04 0.025~0.055 | |
| 3000 | 240 | 0.04 0.030~0.050 | 2300 | 184 | 0.04 0.030~0.050 | 1500 | 120 | 0.04 0.030~0.050 | 3600 | 432 | 0.06 0.050~0.070 | |



The diagrams and table data are examples of test results, and are not guaranteed values.

"Epoch" and "MOLDINO" are registered trademarks of Mitsubishi Hitachi Tool Engineering, Ltd. in Japan.



Attentions on Safety

1. Cautions regarding handling

- (1) When removing the tool from its case (packaging), be careful that the tool does not pop out or is dropped. Be particularly careful regarding contact with the tool flutes.
- (2) When handling tools with sharp cutting flutes, be careful not to touch the cutting flutes directly with your bare hands.

2. Cautions regarding mounting

- (1) Before use, check the outside appearance of the tool for scratches, cracks, etc. and that it is firmly mounted in the collet chuck, etc.
- (2) If abnormal chattering, etc. occurs during use, stop the machine immediately and remove the cause of the chattering.

3. Cautions during use

- (1) Before use, confirm the dimensions and direction of rotation of the tool and milling work material.
- (2) The numerical values in the standard cutting conditions table should be used as criteria when starting new work. The cutting conditions should be adjusted as appropriate when the cutting depth is large, the rigidity of the machine being used is low, or according to the conditions of the work material.
- (3) Cutting tools are made of a hard material. During use, they may break and fly off. In addition, cutting chips may also fly off. Since there is a danger of injury to workers, fire, or eye damage from such flying pieces, a safety cover should be attached when work is performed and safety equipment such as safety goggles should be worn to create a safe environment for work.
- (4) There is a risk of fire or inflammation due to sparks, heat due to breakage, and cutting chips. Do not use where there is a risk of fire or explosion. **Please caution of fire while using oil base coolant, fire prevention is necessary.**
- (5) Do not use the tool for any purpose other than that for which it is intended.

4. Cautions regarding regrinding

- (1) If regrinding is not performed at the proper time, there is a risk of the tool breaking. Replace the tool with one in good condition, or perform regrinding.
- (2) Grinding dust will be created when regrinding a tool. When regrinding, be sure to attach a safety cover over the work area and wear safety clothes such as safety goggles, etc.
- (3) This product contains the specified chemical substance cobalt and its inorganic compounds. When performing regrinding or similar processing, be sure to handle the processing in accordance with the local laws and regulations regarding prevention of hazards due to specified chemical substances.

Mitsubishi Hitachi Tool Engineering, Ltd.

Head Office
Hulic Ryogoku Bldg. 8F, 4-31-11, Ryogoku, Sumida-ku, Tokyo, Japan 130-0026
International Sales Dept. : TEL +81-3-6890-5103 FAX +81-3-6890-5128

Official Web Site

<http://www.mmc-hitachitool.co.jp/e/>

Database for selection Cutting Tool Products **[TOOL SEARCH]**

Europe **MMC Hitachi Tool Engineering Europe GmbH**
Iitterpark 12, 40724 Hilden, Germany.
Tel +49-(0)2103-24820 Fax +49-(0)2103-248230

China **MMC Hitachi Tool Engineering(Shanghai),Ltd.**
Room 2604-2605, Metro Plaza, 555 Loushanguan Road, Changning District, Shanghai, 200051, China
Tel +1(248) 308-2620 Fax +86-(0)21-3366-3050

America **MITSUBISHI MATERIALS U.S.A. CORPORATION**
DETROIT OFFICE Customer service
41700 Gardenbrook Road, Suite 120, Novi, MI 48375-1320 U.S.A.
Tel +1(248) 308-2620 Fax +1(248) 308-2627
CHICAGO OFFICE
1314B North Plum Grove Road, Schaumburg, IL 60173 U.S.A.
Tel +1(847) 252-6371 Fax +1(248) 308-2627

Mexico **MMC METAL DE MEXICO, S.A. DE C.V.**
Av. La Cañada No.16, Parque Industrial Bernardo Quintana, El Marques, Querétaro, CP 76246, México
Tel +52-442-1926800

Brazil **MMC METAL DO BRASIL LTDA.**
Rua Cincinato Braga, 340 13° andar, Bela Vista – CEP 01333-010 São Paulo – SP., Brasil
Tel +55(11)3506-5600 Fax +55(11)3506-5677

Thailand **MMC Hardmetal(Thailand)Co.,Ltd. HT-Division**
CTI Tower 24 Floor, 191/32 Ratchadapisek Road, Klongtoey, Klongtoey, Bangkok 10110, Thailand
Tel: +66-(0)2-661-8170 Fax: +66-(0)2-661-8175

India **Hitachi Metals (India) Pvt. Ltd.**
Plot No 94 & 95, Sector 8, IMT Manesar, Gurgaon-122050, Haryana, India
Tel +91-124-4812315 Fax +91-124-2290015

DISTRIBUTED BY:

