

Equipped with a **360-deg rotating dual camera** for **Front** and **Side** monitoring simultaneously


For recording

Still images and **Videos**



IP68 equivalent cameras offer **dustproof** and **waterproof** performance!

With **oil-resistant**, suitable for observation under harsh environments.

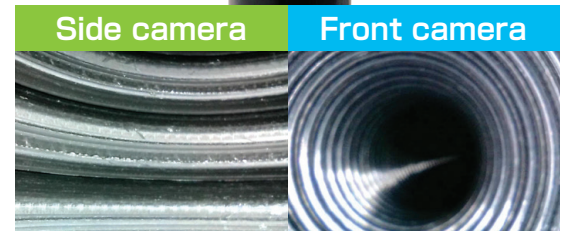

With the 360-deg rotating dual camera, no side-view adapter is required

An industrial endoscope capable of inspecting and capturing images inside curved pipes

360-DEG ROTATING DUAL CAMERA BORE SCOPE

E902-RD / E905-RD / E910-RD

Large and easy-to-view

4.5-inch IPS display



Integrated monitor for real-time viewing

Can be saved to a microSD card.

[File Format]
Still images: JPEG format
Videos: AVI format

[Resolution]

E902-RD/E905-RD:
640×480,1280×720,1920×1080

E910-RD: 1280×720,1920×1080,2592×1944*



*When set to 2592×1944, still images are saved in 2592×1944, while videos are saved in 1920×1080.

[SPECIFICATIONS]

Interface	USB-TypeC
Storage	microSD Card (up to 128GB, Class10 or above)
File format	Still images: JPEG format Videos: AVI format
Display	4.5-inch IPS display
Protection rating of camera	IP68 equivalent dustproof & waterproof, with oil-resistant
Camera field of view	Approx. 70°
Camera focal distance	Approx. 15 ~ 30mm
Camera size	Camera dia.: Approx. 9mm Cable dia.: Approx. 4.5mm
Camera illumination	Front: White LED x 8pcs, Side: White LED x 1pc, Body: White LED x 4pcs
Power supply	Lithium-ion battery ※Continuous usage time: Approx. 3 hrs.
Operating temperature range	Camera lens: 0°C ~ 90°C Main unit: 5°C ~ 40°C
Body dimensions	Approx. 175×100×36mm
Weight	Approx. 310g

Order No.	Model No.	Camera Cable Length
140220	E902-RD	2m
140221	E905-RD	5m
140222	E910-RD	10m

※Size and weight are approximate.

※The appearance and specifications are subject to change without notice for product improvement.

※The color may differ slightly between the printed version and the actual product.

Niigata Seiki Co., Ltd.

5-3-14, Tsukanome, Sanjo, Niigata, Japan, 955-0055
Tel.: +81-256-33-5522 Fax.: +81-256-33-5518
MAIL: intl.sales@niigataseiki.co.jp
URL: https://www.niigataseiki.co.jp

■Distributor